

Standard Colours							
Frame RAL 7016 Anthracite Grey in matt finish DB703 Charcoal Grey Metallic in textured finish RAL 9005 Jet Black in matt finish							
200 Non-st	tandard RAL colours and marine finish available						
Dual colour available but co	lour on opposite side can be seen when doors are open or closed, please ask for photos of this if required						
Bar Handles	Colour matched to door colour or Stainless Steel						
Recessed Handles Colour matched to door colour							
D Handles Colour matched to door colour							

Maximums & Minimums*									
Minimum Door	Minimum Door Maximum Door Minimum Door Maximum Door								
Panel Wid th	Panel Width	Panel Height	Panel Height						
800mm	3000mm	1000mm	3000mm						
*Please refer to	SVG20 & SVG30 ma	ximum panel sizes	based upon site						
exposure on page 9									
Maximum weight per door panel is 250KG									

Thermal performance								
Glass thickness Options 36mm or 36.8mm								
Centre Pane	Example of glass	Overall U-value						
1.0 W/m²k Double glazed	6mm toughened x 24mm Argon x 6mm toughened soft coat coat	from 1.4 W/m²k						
0.7 W/m²k Double glazed	6mm toughened x 24mm Argon x 6mm toughened CUIN Ultra	from 1.2 W/m ² k						

Security							
Locking	Multipoint locking system with hook lock and cams						
	Concealed Anti Lift Blocks						
	Key locking, 6 Pin, Anti Bump, Anti-Snap, Anti-Drill						
Accreditations	PAS 24:2022 certification* (P1a Security Glass Required)						
	Secure By Design™* (P1a Security Glass Required)						

	Weather performance*							
Water Tightness	300 Pa. (Class 7a)							
BS EN 12208								
Air Permeability	600 Pa. (Class 3)							
BS EN 12207								
Wind resistance 1700 Pa. (Class C4)								
*Dependant on size and style, please contact Sunflex UK for specific results.								
Trickle Vent	4000mm² or 8000mm² Airflow in 40mm Add Ons							
Options								
Sill Options (see page 10 for	190mm x 25mm							
further details)	228mm x 25mm							
Heritage Style	30mm Plant on bar							
(See page 19 for								
further details)	70mm Midrail							



SVG20 & SVG30 Key Features

Ultra Slim but <u>not</u> a structurally bonded sliding door

Unlike most ultra slim sliding doors other companies supply, the SVG20 & SVG30 doors are not structurally bonded to the glass. If the glass was structurally bonded to the doors replacing or upgrading the glass in the future would mean buying a new door panel as well, or a whole new set of doors if that door is no longer made. Sunflex UK are proud to not sell structurally bonded sliding doors providing its customers with long term peace of mind. For more information, please read our blog -

https://sunflexuk.co.uk/help-advice/structurally-bonded-glass-know-the-risks-when-choosing-a-sliding-door/

When the SVG doors are open the door panels stack neatly, flush, in line with each other. Such a neat detail and a contemporary appearance. Most sliding doors from other companies are staggered when open, not as neat or as well designed.

Flush Stacking Panels

Slim From Any Angle sliding door

The SVG20 has a 20mm sight line and the SVG30 has a 30mm sight line. The SVG doors are designed without the need for any external reinforcing profile or a chunky frame that extends away from the glass. The SVG doors are slim from any angle, not just face on. Only 59mm front to back no matter the size of the doors. When choosing a sliding door always check the depth of the interlock, how this will look from an angle, not just the straight on sightline.

Sunflex UK have been manufacturing and supplying sliding doors across the UK for over 20 years. Over this time the SVG doors have had continuous updates and innovations, and you can benefit from the tried and tested finished product. Every Sunflex UK SVG door is made in the Sunflex UK manufacturing plant. Sunflex UK supplies to a hand selected network of distributors across the UK to ensure the best possible service and complete peace of mind.

Complete Peace Of Mind

Advanced Performance Quad Wheel Carriage

Over the past 20 years Sunflex UK have learned that the most crucial part of any sliding door is the wheel carriage the doors run on. This is the engine of the sliding doors and will dictate how smoothly the doors slide and how long the doors will last. When choosing a sliding door compare what the wheel carriage looks like and what the wheels are made of. Other sliding doors have plastic wheels or just a 2 wheel carriage. The Sunflex UK SVG doors have 4 wheels on each running carriage, made of stainless-steel running on a stainless steel track, perfect for smooth sliding and longevity.

The door handle can make or break the look of a sliding door. Not only must these look good they must also be a pleasure to use. The SVG doors have a range of handle styles, either colour matched to the doors or in stainless steel.

Handle Options

Range of opening Styles

The SVG doors have a range of opening styles. Pocket doors providing a 100% clear opening, open corners for a seamless transition between inside and outside, frameless corners for dual aspect views. You can combine the open corners with pocket doors for a real wow factor and the centre piece of your build.

The SVG sliding doors hold the prestigious Secured By Design award, a police security initiative. A continuous 6-point locking system with concealed anti-lift blocks. PAS24 compliant meeting the requirements of building regulations Part Q and a 6-pin anti-bump, anti-snap, anti-drill key cylinder exceeding British insurance requirements of BS3621.

Security



Standard Configurations Key-X= Sliding M=Main sliding on inner track O= Fixed panel OX XO OLO= Centre door sliding Left ORO= Centre door sliding Right Note:-For Corner and Pocket options please see corner and pocket technical manual ΜX XM XXP PXX XMXX XMXX OMXO OXMO **PXMXXP PXXMXP** OLO ORO




Description: SVG20 & SVG30

System: SVG 20 & SVG 30 Rev.

Flush Stacking Panels

2 Doors, 1 Sliding, 1 Fixed (XO)

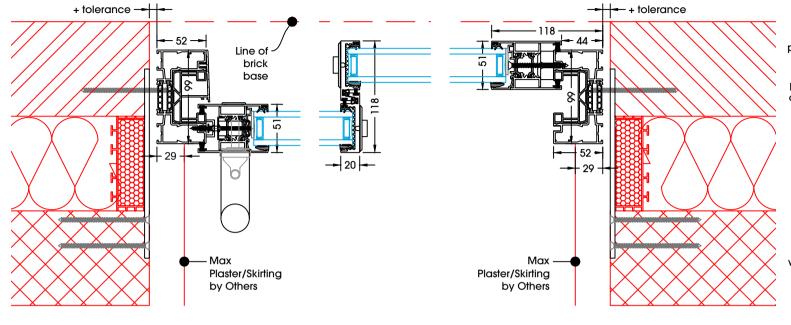


Flush Stacking Panels When Open

The SVG20 & SVG30 can provide flush stacking panels when open. Such a neat design compared to many other sliding doors that must be staggered when open. To achieve this the protruding handle and lock must be on the inside only, colour matched recessed handle can be on the outside. There should also be a fixed door panel. A fixed door panel also allows the colour matched treadplates to be used on the outside tracks for a neater look.

Flush Stacking Panels When Open (All Panels Sliding)

When all doors slide, flush stacking panels are only possible with a protruding handle and key lock on the inside only of the inner panel and outside only of the external panel. The doors would flush stack to one side only, when the panel on the inner track opens to the opposite side.

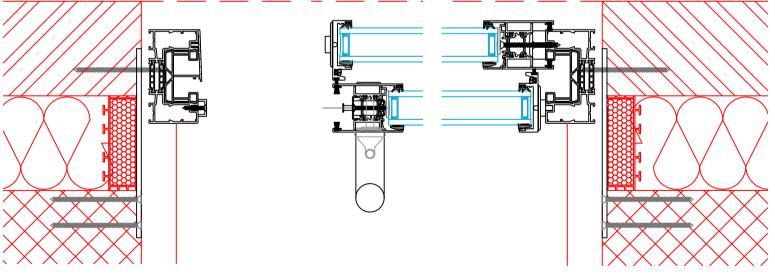



Description: SVG20 & SVG30


Plan Details

System:	SVG	20 &	SVG	30
---------	-----	------	-----	----

Rev.

Flush Stacking Panels

2 Sliding Doors, 1 Plant-on panel (XXP)

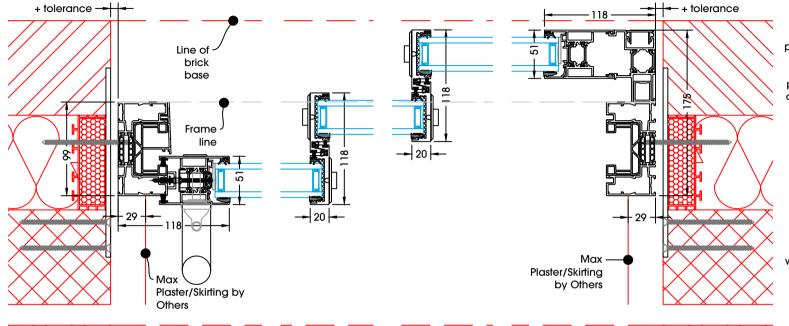


Flush Stacking Panels When Open

The SVG20 & SVG30 can provide flush stacking panels when open. Such a neat design compared to many other sliding doors that must be staggered when open. To achieve this the protruding handle and lock must be on the inside only, colour matched recessed handle can be on the outside. There should also be a fixed door panel. A fixed door panel also allows the colour matched treadplates to be used on the outside tracks for a neater look.

Flush Stacking Panels When Open (All Panels Sliding)

When all doors slide, flush stacking panels are only possible with a protruding handle and key lock on the inside only of the inner panel and outside only of the external panel. The doors would flush stack to one side only, when the panel on the inner track opens to the opposite side.

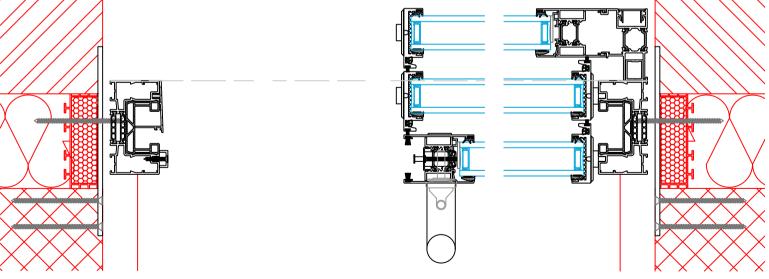



Description: SVG20 & SVG30 Plan Details


System: SVG 20 & SVG 30


Page: 06

Rev.

Flush Stacking Panels

1 Fixed, 1 Sliding Door (Main Panel), 1 Sliding Door, 1 Fixed (OMXO)

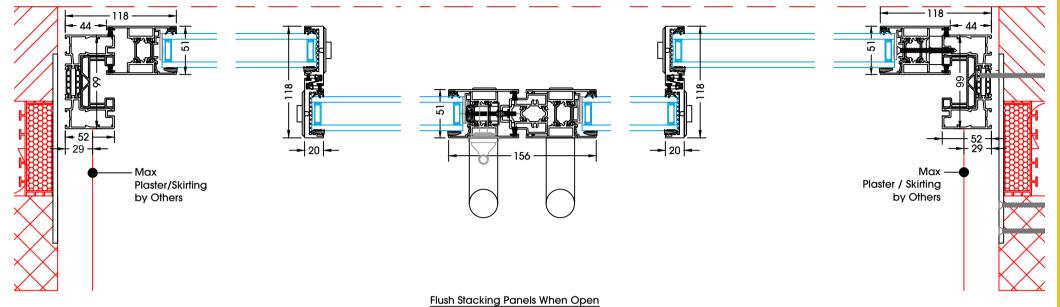




The SVG20 & SVG30 can provide flush stacking panels when open. Such a neat design compared to many other sliding doors that must be staggered when open. To achieve this the protruding handle and lock must be on the inside only, colour matched recessed handle can be on the outside. There should also be a fixed door panel. A fixed door panel also allows the colour matched treadplates to be used on the outside tracks for a neater look.

Flush Stacking Panels When Open (All Panels Sliding)


When all doors slide, flush stacking panels are only possible with a protruding handle and key lock on the inside only of the inner panel and outside only of the external panel. The doors would flush stack to one side only, when the panel on the inner track opens to the opposite side.

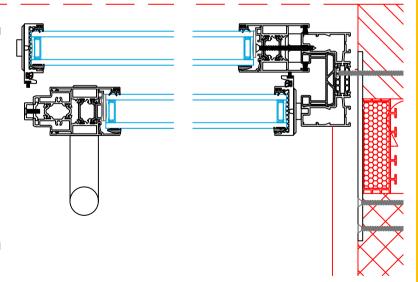



Description: SVG20 & SVG30

Plan Details

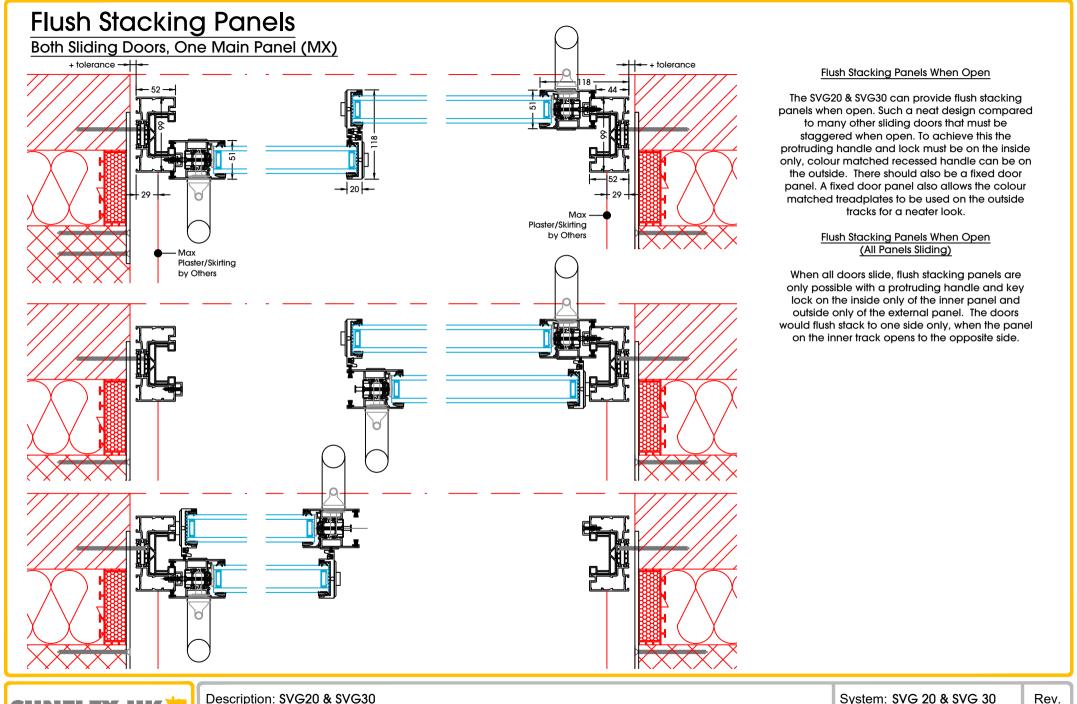

Example of Handle both sides stacking

System: SVG 20 & SVG 30

Maximum Glazing Weight per M² shown below. Max Panel Weight 250kg. please check with your glass supplier for there glass paramaters

SVG30 Max Panel Sizes

3000	55kg	55kg	55kg	55kg	55kg	55kg	50kg	45kg	45kg	40kg	40kg										
2900	55kg	55kg	55kg	55kg	55kg	55kg	50kg	50kg	45kg	45kg	40kg	40kg									
2800	55kg	50kg	45kg	45kg	40kg	40kg	40kg														
2700	55kg	50kg	45kg	45kg	45kg	40kg	40kg	40kg													
2600	55kg	50kg	50kg	45kg	45kg	40kg	40kg														
2500	55kg	50kg	50kg	50kg	45kg	45kg	40kg	40kg													
2400	55kg	50kg	50kg	50kg	50kg	45kg	45kg	40kg	40kg												
2300	55kg	50kg	50kg	50kg	50kg	50kg	45kg	45kg	45kg	40kg	40kg										
2200	55kg	50kg	55kg	50kg	50kg	45kg	45kg	45kg	40kg	40kg	40kg	40kg									
2100	55kg	50kg	50kg	50kg	50kg	40kg	40kg	40kg	40kg	40kg											
2000	55kg	50kg	50kg	50kg	45kg	40kg	40kg	40kg	40kg												
	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000

Maximum Glazing Weight per M² shown below. Max Panel Weight 250kg. please check with your glass supplier for there glass paramaters

SVG20 Max Panel Sizes

3000	55kg	55kg																			
2900	55kg	55kg	55kg																		
2800	55kg	55kg	55kg	55kg	55kg																
2700	55kg																				
2600	55kg	50kg																			
2500	55kg	50kg	50kg	50kg	45kg																
2400	55kg	50kg	50kg	50kg	50kg	45kg	45kg	45kg													
2300	55kg	50kg	50kg	50kg	50kg	50kg	45kg	45kg	40kg												
2200	55kg	50kg	55kg	50kg	50kg	45kg	45kg	45kg	40kg	40kg	40kg	40kg									
2100	55kg	50kg	50kg	50kg	45kg	45kg	40kg	40kg	40kg	40kg											
2000	55kg	50kg	50kg	50kg	45kg	40kg	40kg	40kg	40kg												
	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000

Suitable for wind pressure up to 750 Pascals.

Suitable for wind pressure up to 1200 Pascals.

Suitable for wind pressure up to 1700 Pascals.

(Contact Sunflex UK with post code and building height for an indication of expected wind pressure or check with structural engineer / architectetc.)

Minimum of 6mm thick glass required.

Any heights over 2500mm should be using 8mm glass units to prevent glass bowing.

Spacer bar to project no more than 12mm into unit




Description: SVG20 & SVG30

Max glass weights


System: SVG 20 & SVG 30

Rev.

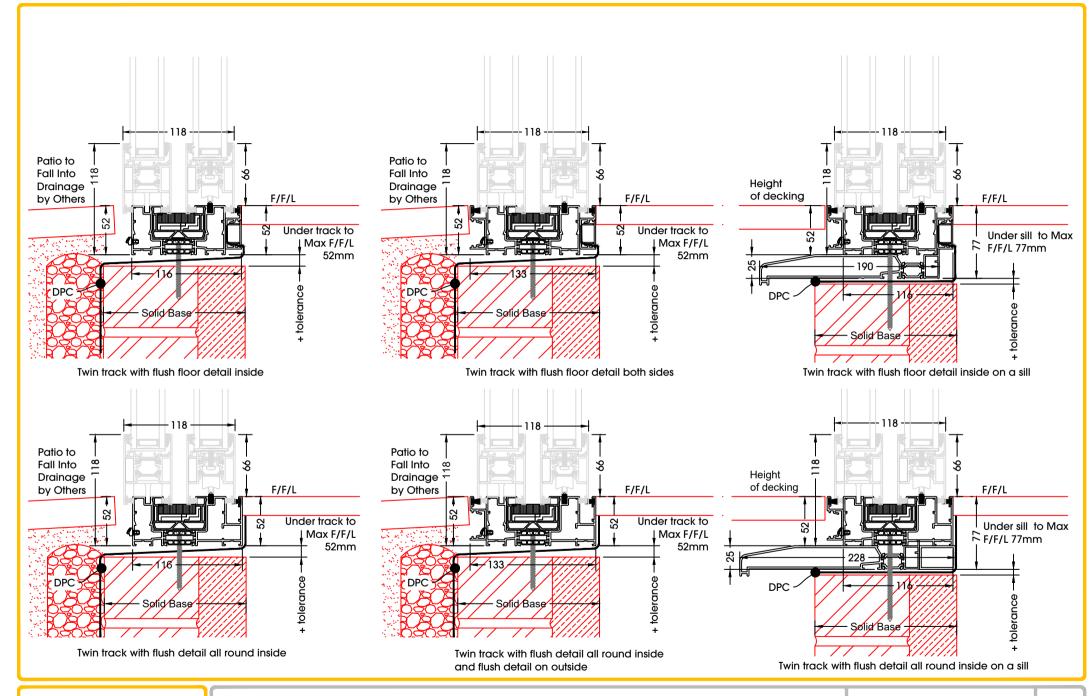




Description: SVG20 & SVG30 Base Details

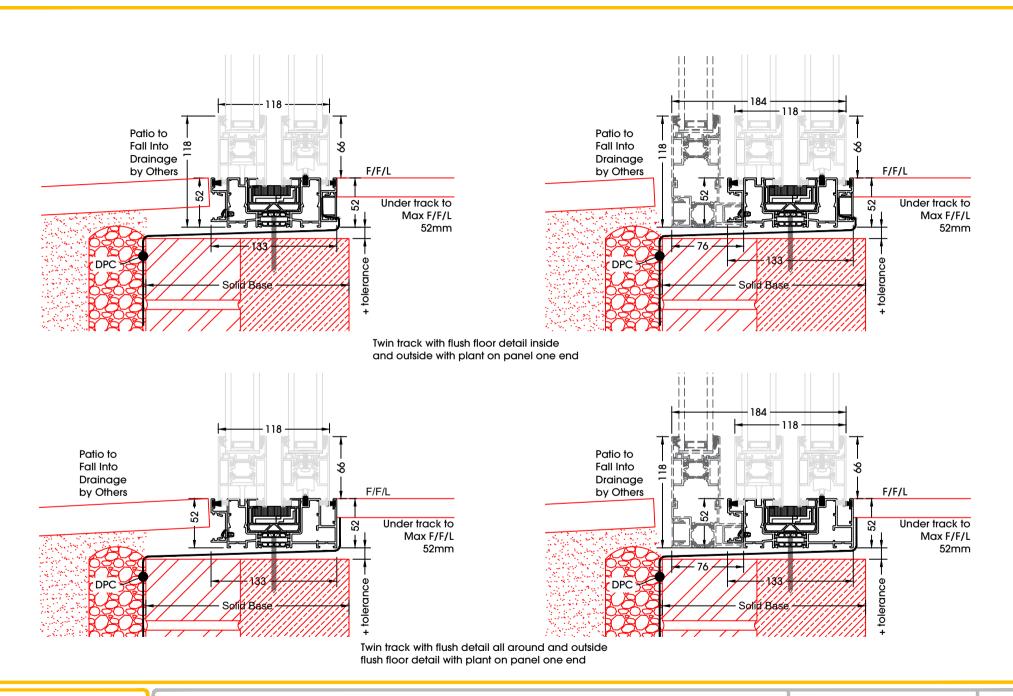




Description: SVG20 & SVG30

Base Details - Plant On Panel

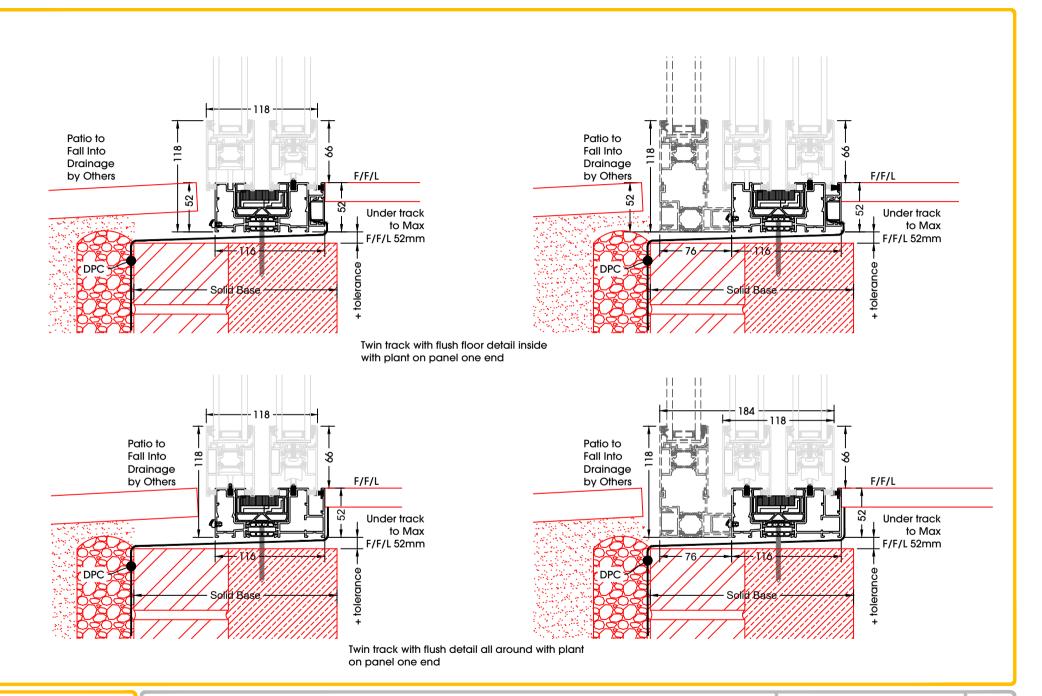




Base Details - Plant On Panel

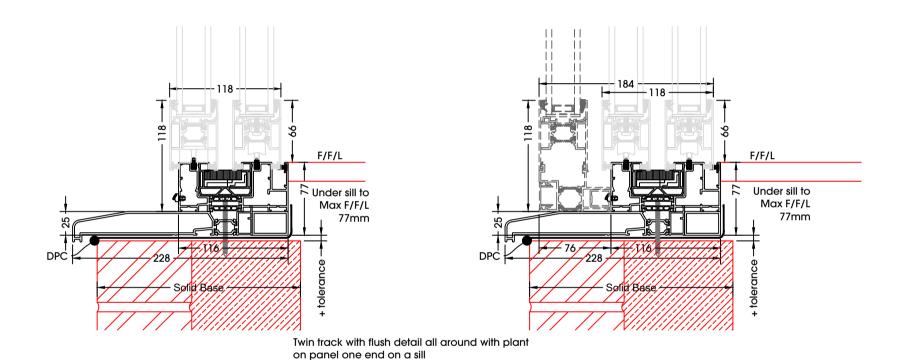




Base Details - Plant On Panel


System: SVG 20 & SVG 30	Rev.
Page: 13	




Twin head track



Twin head track with flush track all around



Twin head track with trickle vent





Twin head track with flush track all around with trickle vent




Description: SVG20 & SVG30 Head Details


System: SVG 20 & SVG 30	Rev.
Page: 14	

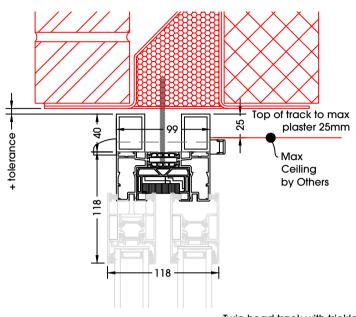

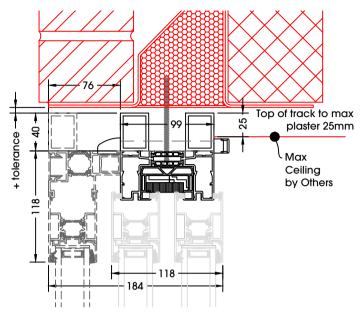

Twin head track with trickle vent and plant-on frame

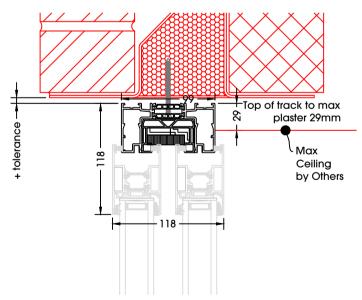

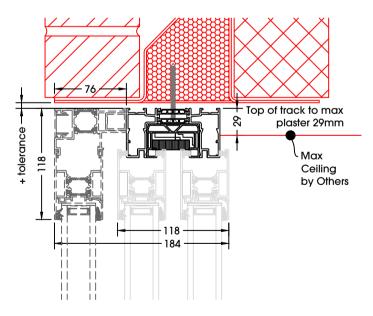


Twin head track with plant-on frame




Description: SVG20 & SVG30 Head Details - Plant On Panel

System: SVG 20 & SVG 30	Rev.
Page: 15	

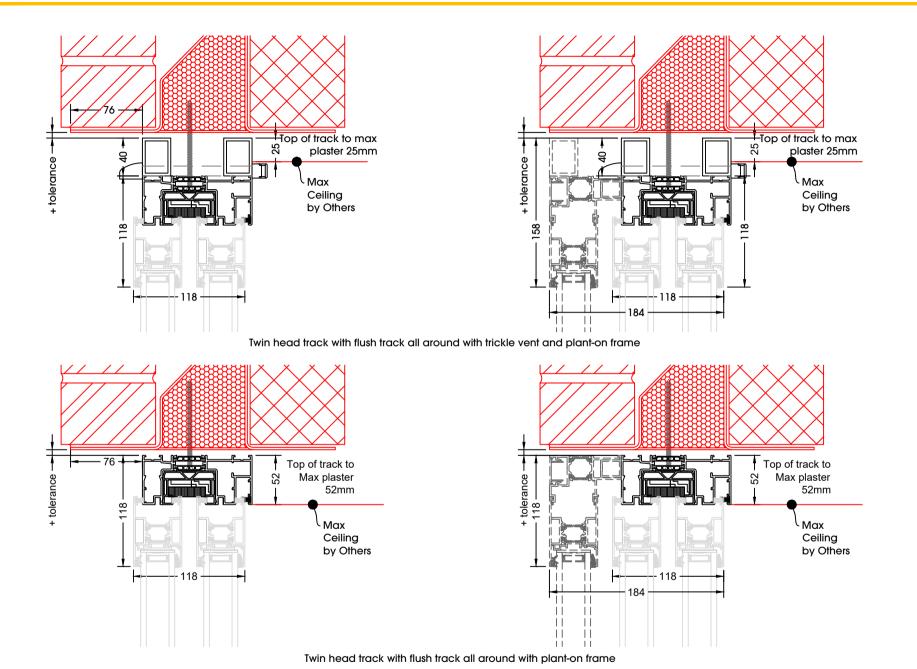





Head Details - Plant On Panel




Jamb to wall detail with fixed door on outer track




Jamb to wall detail with fixed door on outer track with flush track all round




Jamb to wall detail with Sliding door on inner track




Jamb to wall detail with Sliding door on inner track with flush track all round



Jamb to wall detail with Sliding door on outer track




Jamb to wall detail with Sliding door on outer track with flush track all round



Note:-No handles shown For handles see sheets 19 & 20




Description: SVG20 & SVG30 Jamb Details System: SVG 20 & SVG 30 Rev.

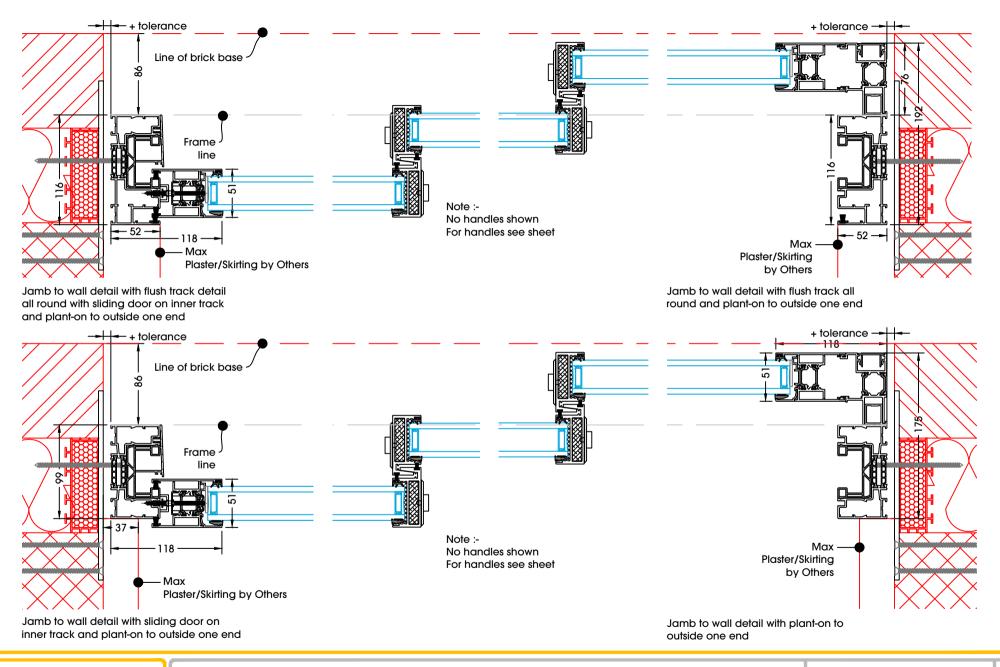



SUNFLEX UK


Description: SVG20 & SVG30

Jamb Details - Plant On Panel










30mm plant-on (To be trimmed and applied on site) Midrail / transom / mullion detail

SUNFLEX UK

Description: SVG20 & SVG30 Mullion Details

System: SVG 20 & SVG 30

Rev.

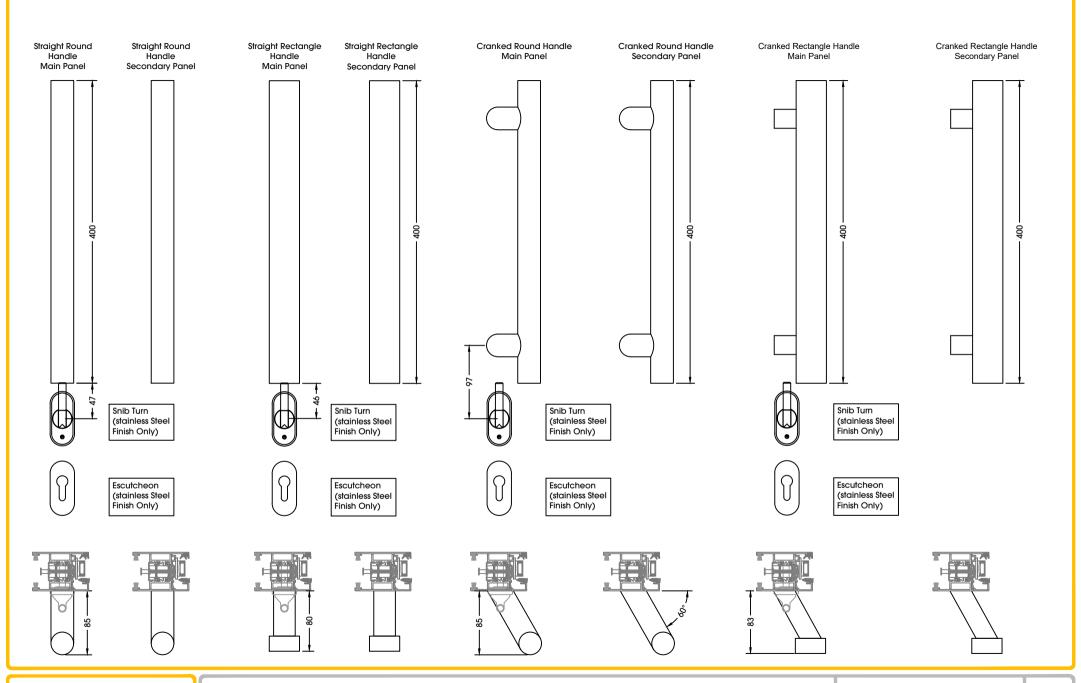





Handles

System: SVG 20 & SVG 30

Page: 20

Rev.

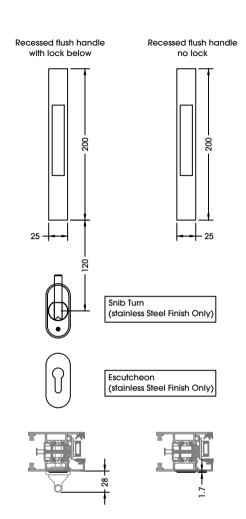

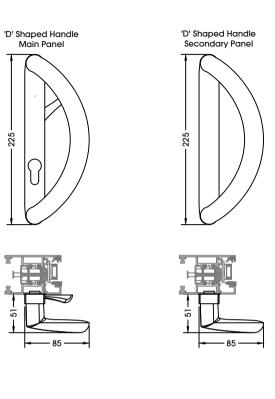



Handles

Bifold doors

Sliding doors

Heritage doors

Aluminium windows

Glass roofs

Front doors

Internal glass partitions

Commercial doors

